




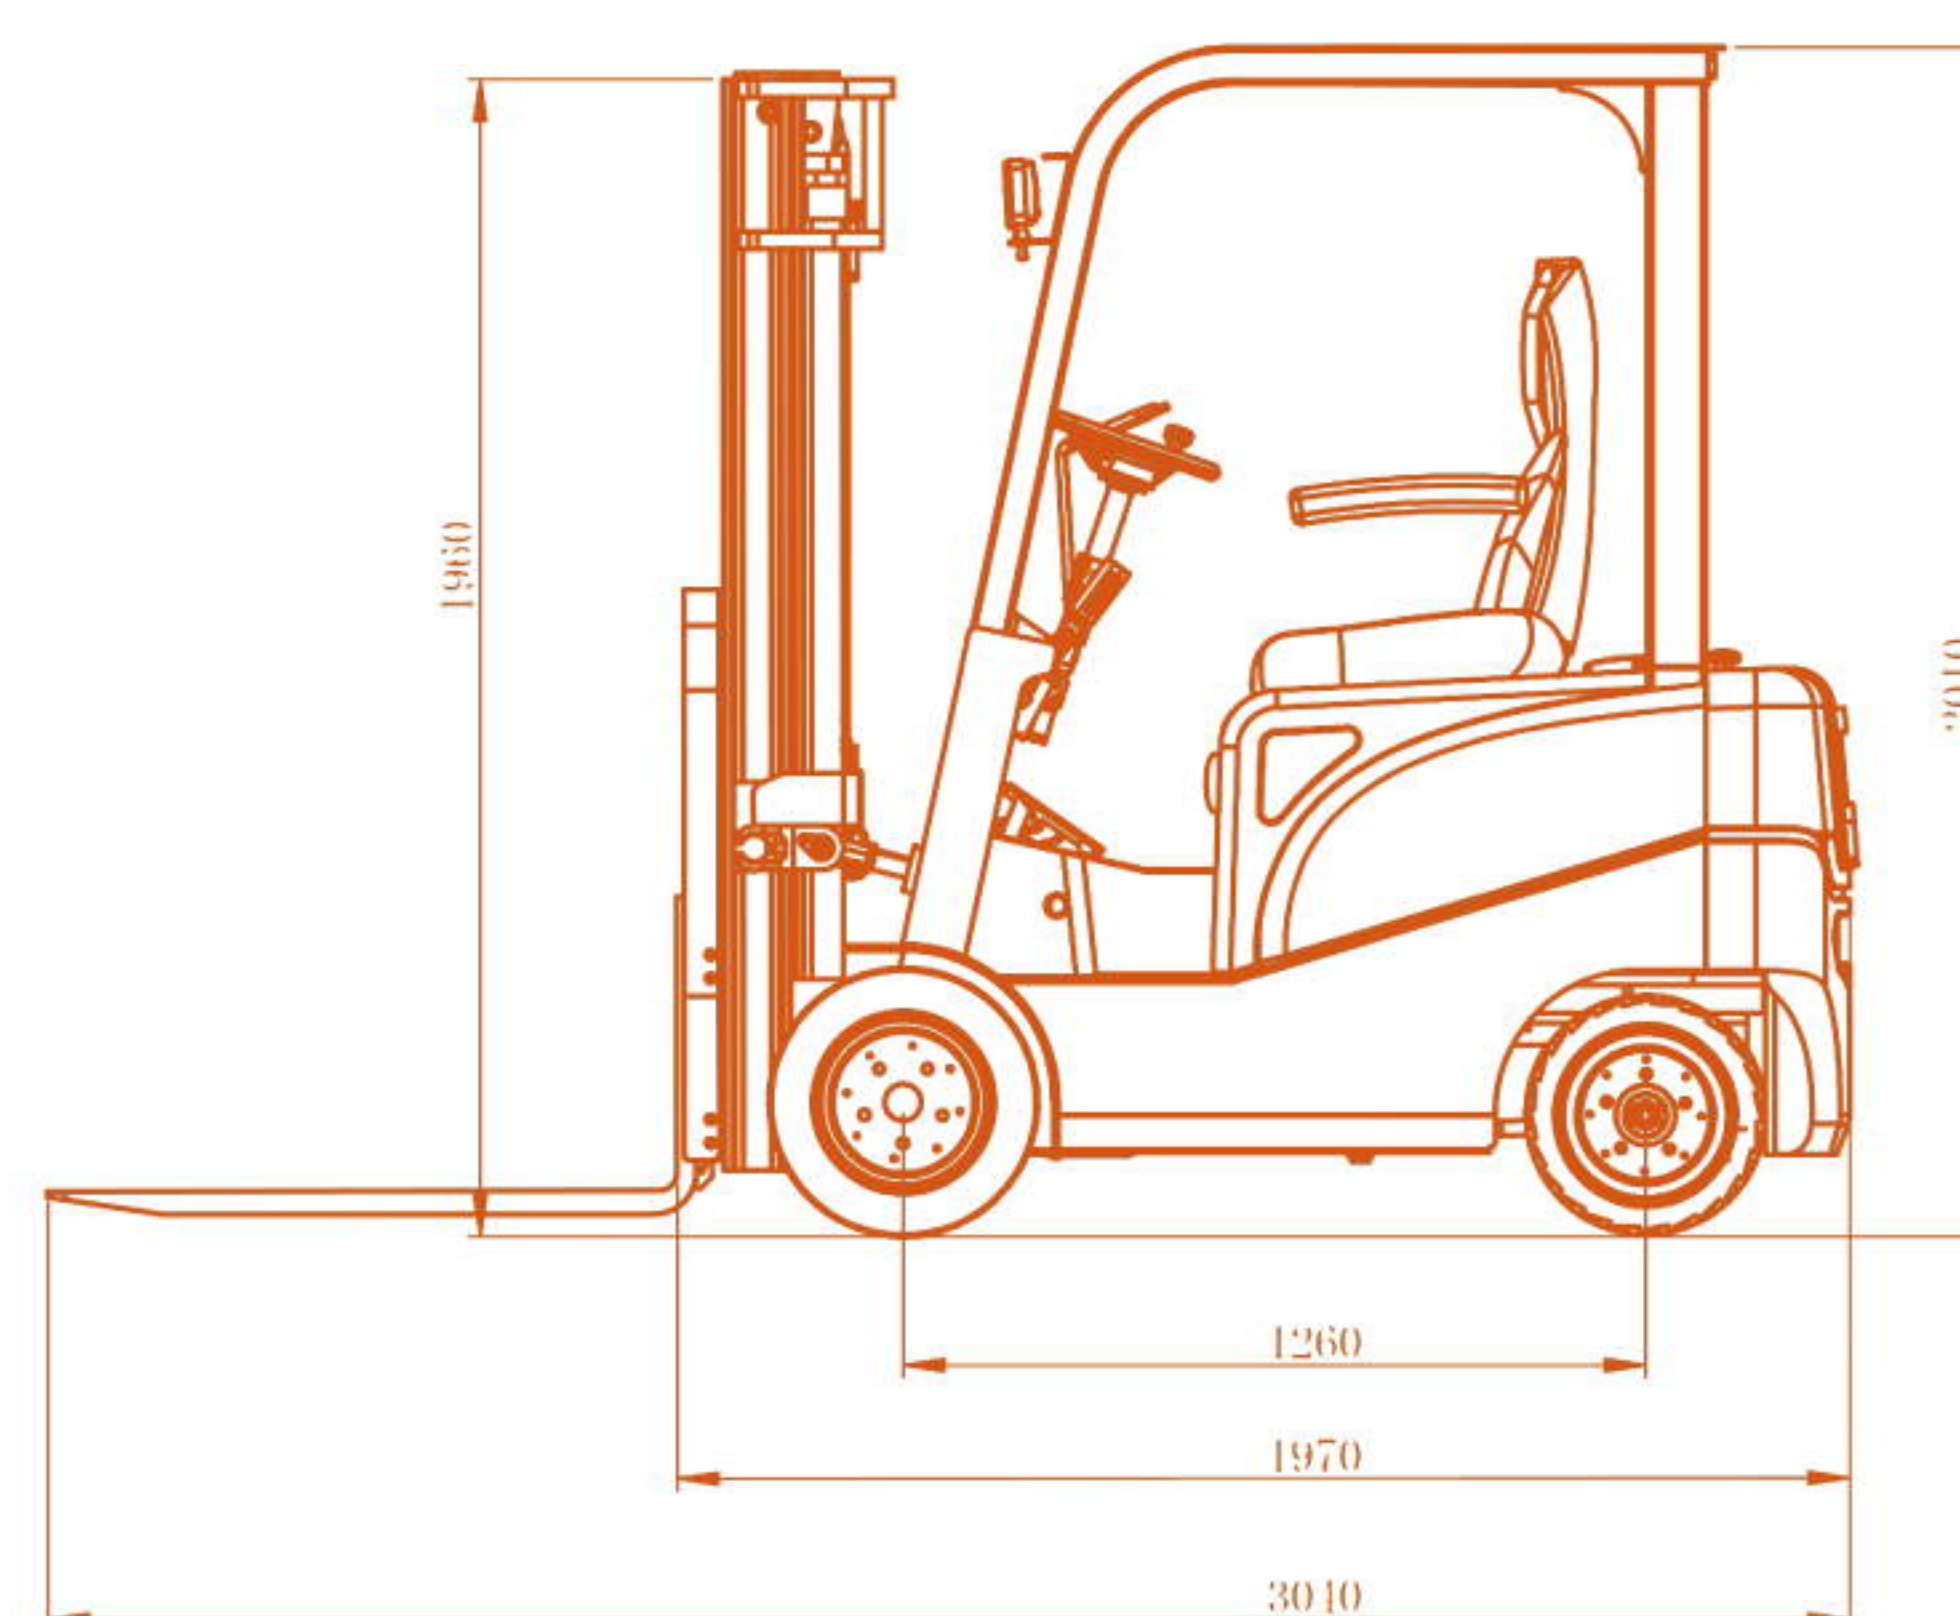

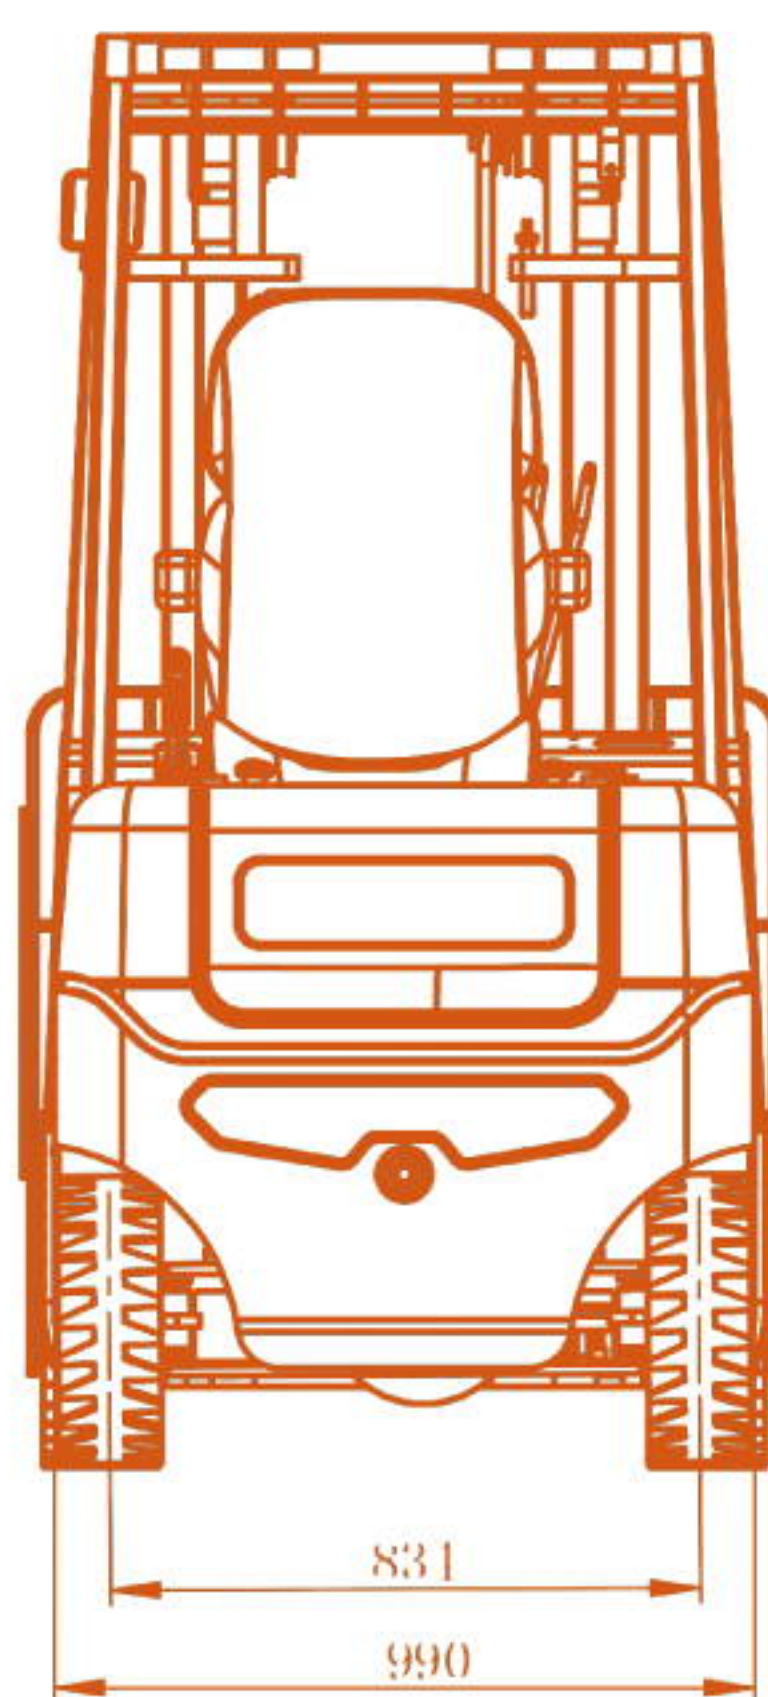

EVERUN EREF16 ELECTRIC FORKLIFT 4WD

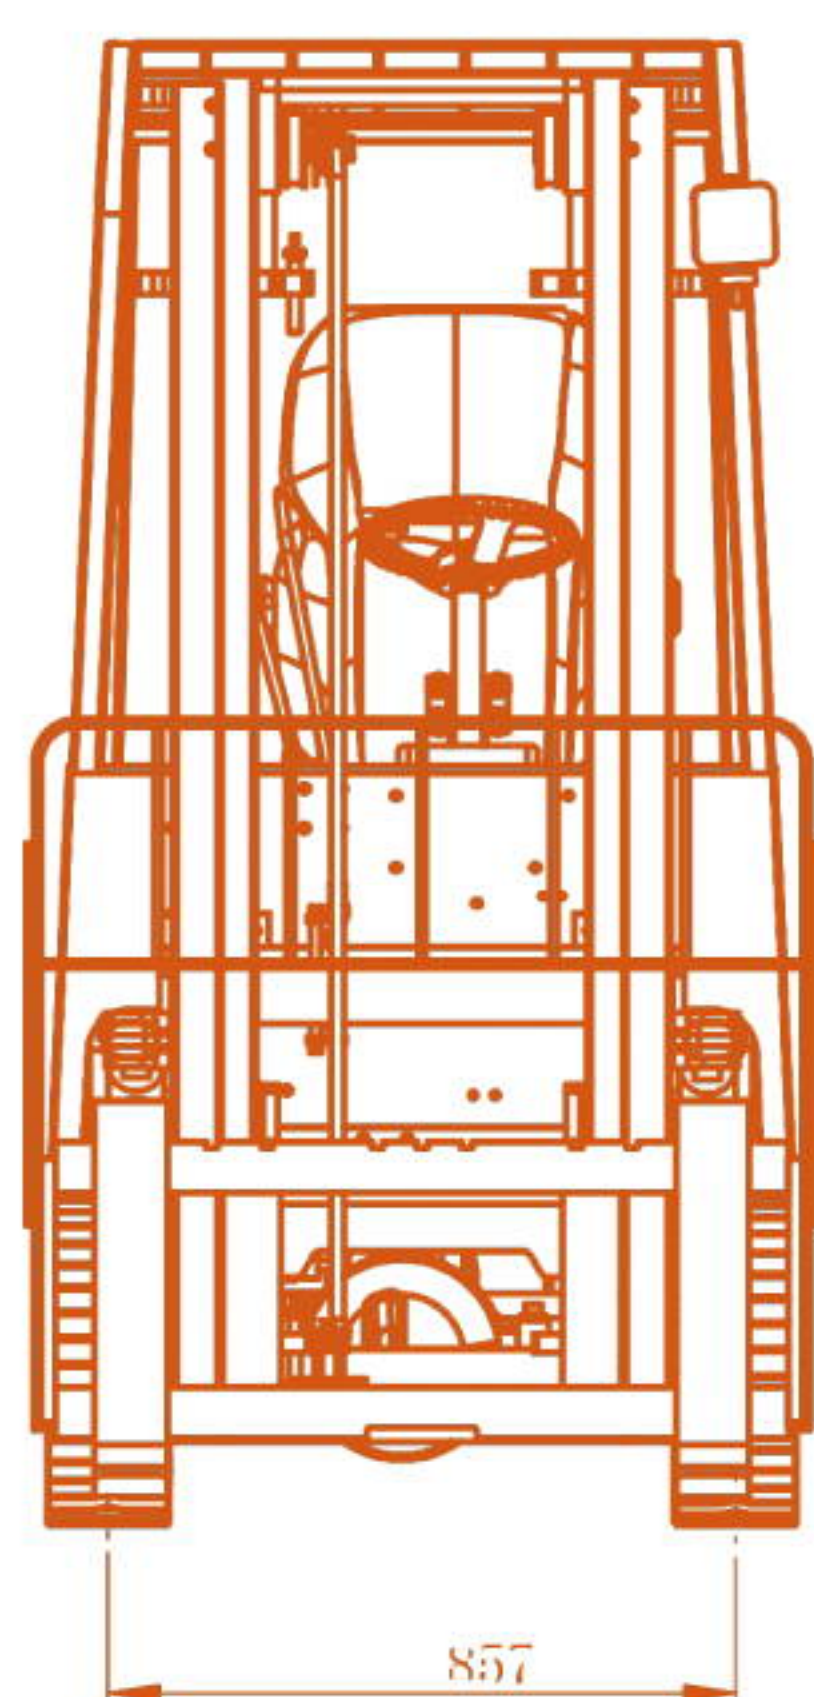

Technical Parameter

Power Type	Battery	Wheel Base	1260mm
Rated Load	1500kg	Front Overhang	385mm
Load Center Distance	500mm	Back Overhang	365mm
Driving Type	Seat	Front Wheel Tread	1010mm
Length with Fork	3040mm	Back Wheel Tread	100mm
Length Without Fork	1970mm	Min Floor Clearance	130mm
Whole Wid	1000mm	Max Lifting Height	3000mm
Height No Lifting Frame	1960mm	Free Lifting Height	40mm
Top Frame Height	2010mm	Max Climbing Angle	≤15%
Max Height Working	4050mm	Whole Weight	2650kg
Distance from Seat to Top Light	1000mm	Driving Wheel	2/2
Fork Changing	1040/200mm	Type Model	Solid Tire
Min Turning Radius	2100mm	Front Tyre	18x7-10
Min Driving Width	3785mm	Pump Power	5.5DCkw
Frame Angle	6°/12°	Rear Tyre	16x6-8
Max Lifting Speed Without Goods	300mm/s	Hand Brake	Hydraulic Pedal
Max Lifting Speed With Full Goods	260mm/s	Brake Type	M-Hand
Max Speed Without Goods	14km/h	Battery Volt/ Capacity	48V/230Ah
Max Speed with Full Goods	13km/h	Driving Motor Power	6.5ACkw

Qingdao Everun Machinery Co.,Ltd

Address : Room 902, Yongxin International Finance Centre
No.6 Qinling Road, Qingdao, China

Tel : +86-532-80997859

Website: www.everun.cc

▶▶▶  www.everun.com

Email : info@everun.cc

Fax: +86-532-80993178

