



WHEEL LOADER
ER408T

 Rated Power | 25kW

 Loading Capacity | 800kg

 Net Weight | 2700kg

ER408T



 Tel: +86-532-80997859

 Website: www.everun.com

 Instagram: everunmachinery

 Fax: +86-532-80993178

 Facebook: everunmachinery

 LinkedIn: Qindao Everun Machinery Co., Ltd


 Email: info@everun.com

 Youtube: everunmachinery

QINGDAO EVERUN MACHINERY CO., LTD

ER408T | WHEEL LOADER

EVERUN[®]
SINCE 2007

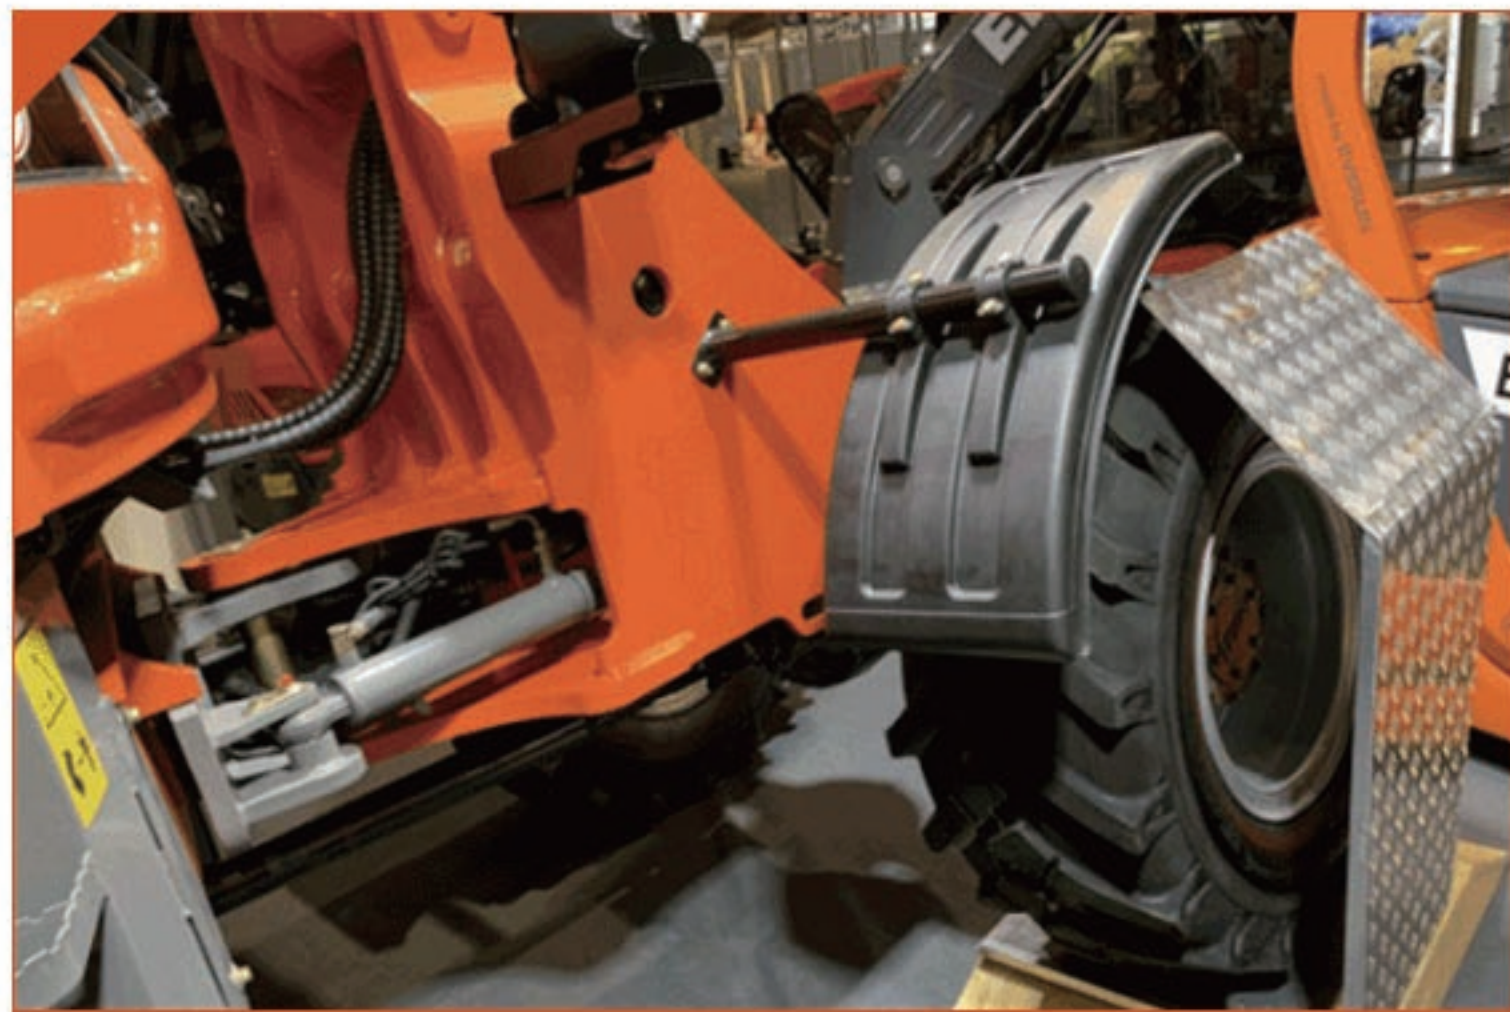

• Everun articulated oscillating floating joint



• Standard wider 31*15.5-15 tubeless tires



• One bigger and stronger lift cylinder



• Streamline designed engine hood & iron Casting rear bumper



• Easily accessible lubrication points




• Short hydraulic hose lengths




• ROPS & FOPS cabin with maintenance port




• Vibration-damped working area

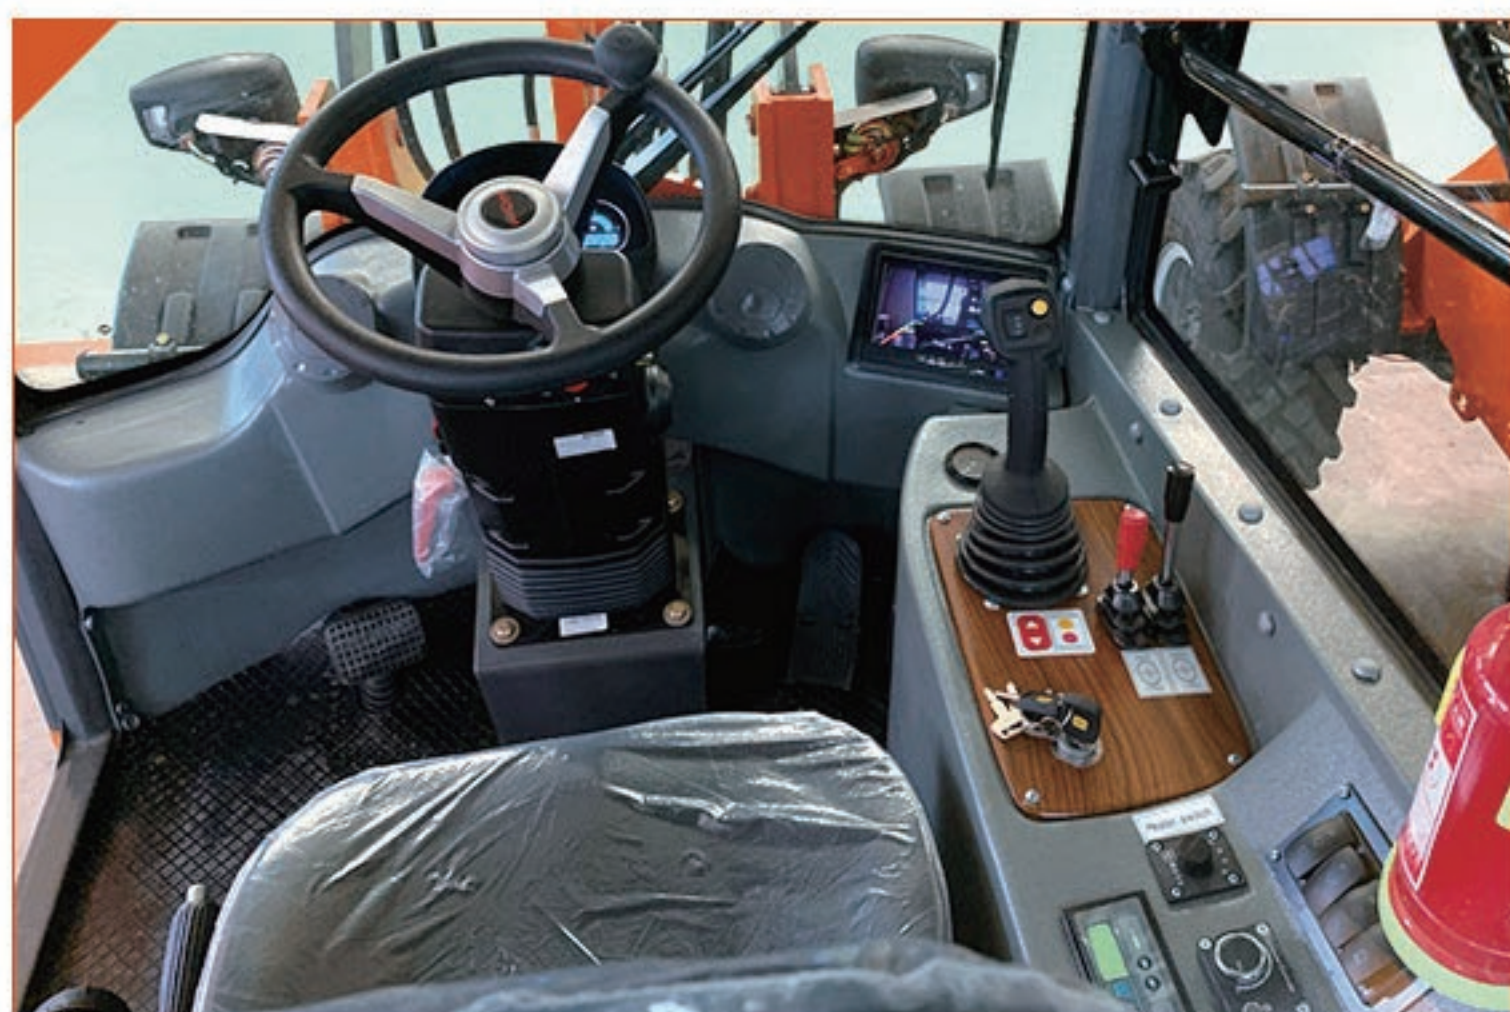

• Ergonomic joystick

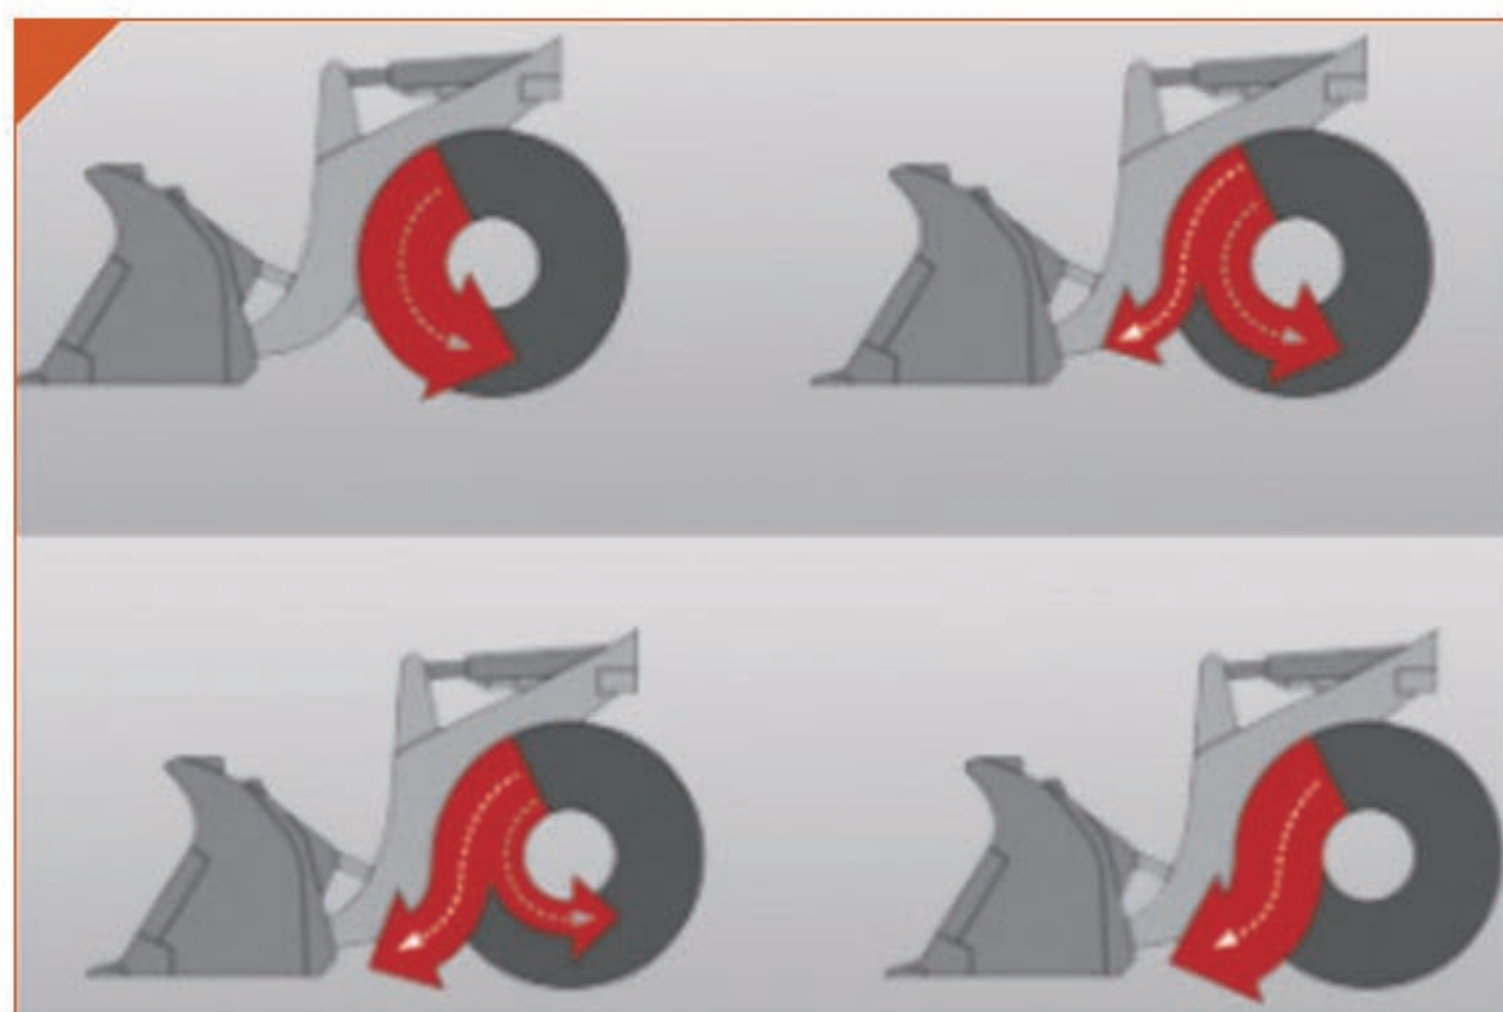

• Brake pedal & torque converter transmission system

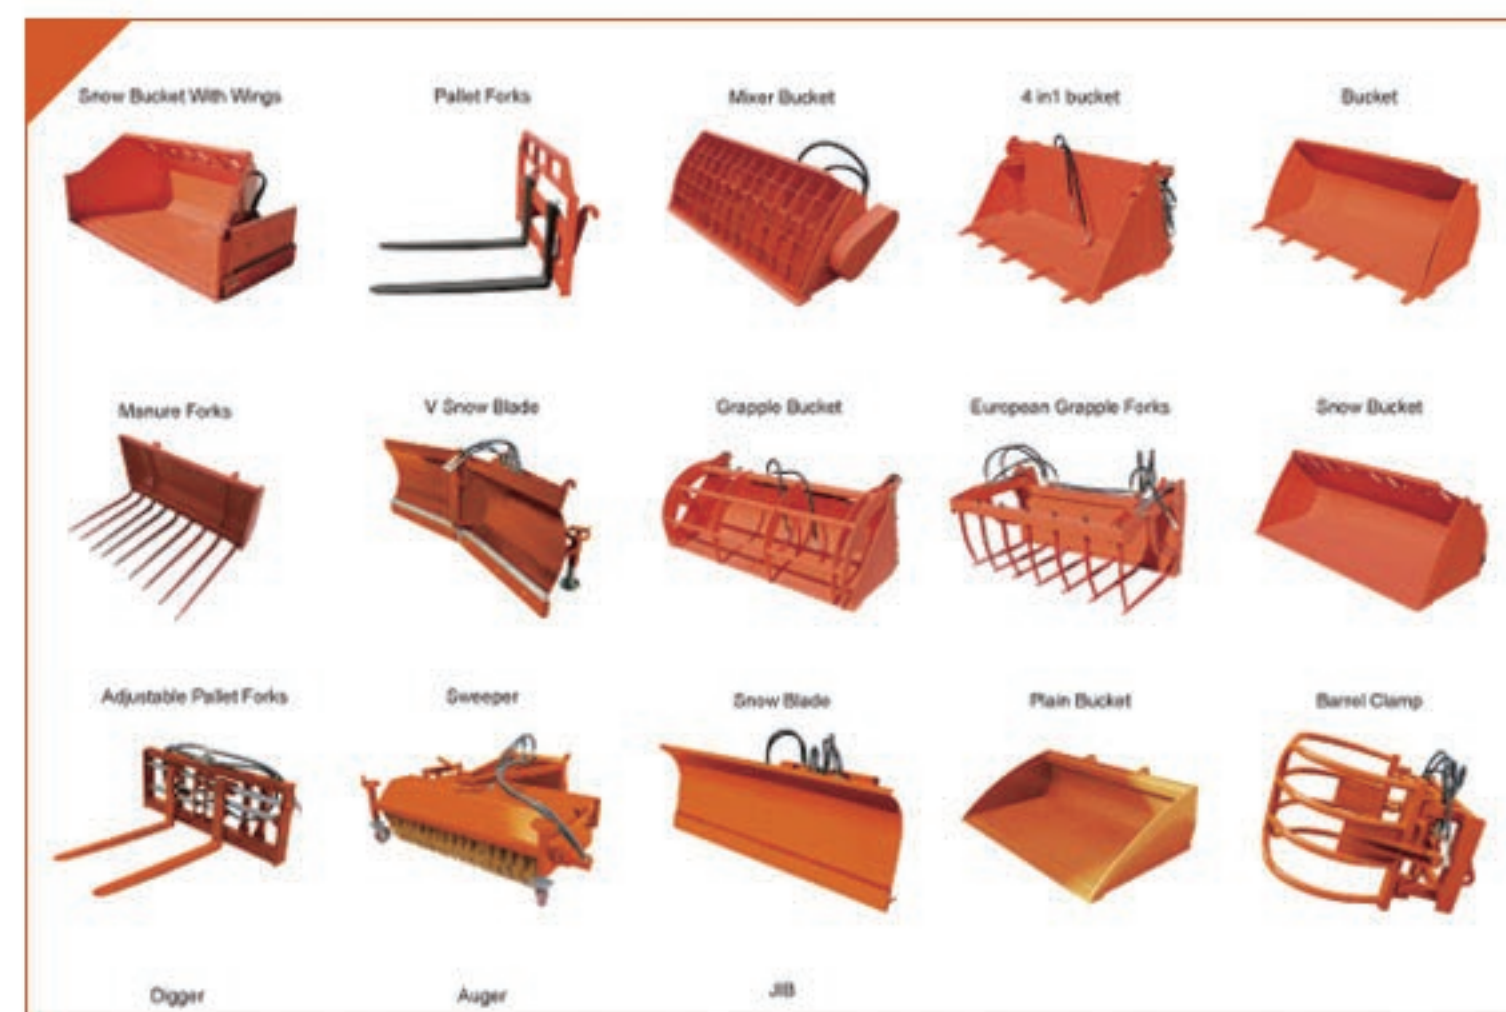

• Large selection of attachments



• Large selection of tyres

Specifications

Engine Details

Model	Changchai ZN390Q
Rated Power	25 kW
Rated Speed	2400r/min(rpm)
Max.Torque	109/1680 N.m/min
Min Fuel-consume Ratio	≤265g/kW.h

Operating Specifications

Bucket Capacity/Width	0.38m³/1.5m
Loading Capacity	800kg
Net Weight	2700kg
Maximum Tractive Force	20kN
Maximum Breakout Force	22kN
Maximum Grade Ability	20°
Maximum Dump Height	2100mm
Maximum Dump Reach	735mm
Minimum Turning Radius	3905mm

Hydraulic System

System Working Pressure	18MPa
Boom Lifting Time	3s
Total Time	7.4s
Fuel Tank Capacity	55L
Function Of Leveling Automatically	yes

Overall Dimensions

Overall Length (bucket on ground)	4706mm
Overall Height	2530mm
Overall Width	1570mm
Dumping Height	2120mm
Dumping Reach	800mm
Min.Ground Clearance	260mm
Lifting Height	3270mm
Lifting Distance	1360mm
Wheel Base	2170mm
Wheel Thead	1200mm

Brake System

Service Brake	Mechanical, drum brake
Parking Brake	Manual disk brake

Transmission System

Gearbox Mode	Power shift normally engaged straight gear
Gear Shift	Mechanical, 2forward shift, 2 reverse shift
Maximum Speed	23km/h

Tyre

Type Specification	31*15.5-15
Front Tyre Pressure	310kPa
Rear Tyre Pressure	310kPa

QINGDAO EVERUN MACHINERY CO., LTD